Anchorage 2335 (66") Open House 2334 (54")





*Not recommended for use as Upholstery.



Anchorage 2335 (66") **Open House 2334** (54")

Specifications

Content	35% post-consumer recycled polyester 65% pre-consumer recycled polyester
Weight	2334 - 13.1 ± 1.0 oz./lin. yd. 2335 - 15.0 ± 1.0 oz./lin. yd.
Width	2334 - 54" min. useable 2335 - 66" min. useable
Repeat	none
Backing	none
Treatment	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

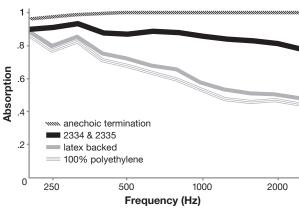

NRC of anechoic termination 1.00
NRC of fabric in front of anechoic termination .85

Performance



Colorfastness to Light (AATCC 16.3 Option 3) **Grade 4 min. at 40 hours**



Colorfastness to Crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) **275 lbf min. warp and fill**

Seam Slippage (ASTM D4034) **50 lbf min. warp and fill**

Pilling Resistance (ASTM D3511) Class 4 min.



Flammability

CA Technical Bulletin 117-2013 Section 1 NFPA 260/UFAC Fabric Classification - Class I ASTM E84 Class I or A



Abrasion (ASTM D4157)
250,000 double rubs min. cotton duck

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex

Miscellaneous

Proudly woven in North America supporting our local communities.

Please specify when ordering whether 54" or 66" width is needed. Dye lots may vary. Differences may also occur between corresponding colors of Anchorage 2335 and Open House 2334.

Application testing of this product is recommended. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



Inis pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.



Amaze 2139

Fog 1265

Morel


Platinum 1260




Bone 1262




Dune 1263



Sky 1268



Steel 1266



Flannel

Amaze 2139

Specifications

82% polyester 18% post-consumer recycled polyester
12.9 ± 1.0 oz./lin. yd.
66" min. useable
12.8" vertical 11.7" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

Proudly woven in North America supporting our local communities.


Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.

Performance

**	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
00	Colorfastness to Crocking (AATCC 8)





Sustainability



This pattern is included in the underwriters laboratory panel fabric recogniprogram. Additional testing of this U.L. recognized component fabric is required on approved panels from participating manufacturers.

Axiom 3947



Birch 7010




Maize 7020



Tin 7040



Driftwood 7030



Metallic 7032



Sparrow 7031



Graphite

Axiom 3947

Specifications

Content	100% pre-consumer recycled polyester
Weight	12.0 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

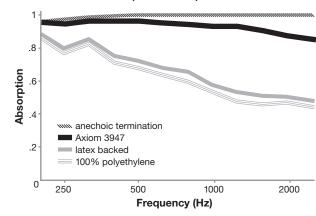

NRC of anechoic termination	
NRC of fabric in front of anechoic termination	.95

Performance

Colorfastness to Light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours

Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034)
150 lbf min. warp and 175 lbf min. fill

* Flammability (ASTM E84)
Class I or A

Sustainability

100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.







Bailey 2299

Paris Frost 7020



Allagash Mist 7040



Khaki 7012



Belmont Silver 7010



Platinum 7013




Cave 7047



Baxter Beige 7011



Sherman Pewter 7024



Kennebec Blue

Bailey 2299

Specifications

Content 100% pre-consumer recycled polye	
Weight	8.3 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

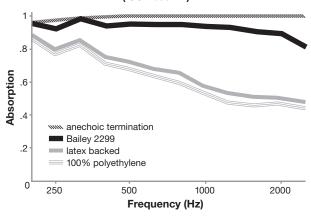

NRC of anechoic termination 1.00 NRC of fabric in front of anechoic termination .95

Performance

Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet Breaking Strength (ASTM D5034) 150 lbf min. warp and 100 lbf min. fill

Flammability (ASTM E84) Class I or A

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex 100% recycled and recyclable



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.







Beacon 9256



Beacon 9256

Specifications

100% pre-consumer recycled polyester
9.7 ± 1.0 oz./lin. yd.
54" min. useable
.25" vertical .5" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.



*Certification Marks owned by the Association for Contract Textiles, Inc.

Performance

Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 225 lbf min. warp and 175 lbf min. fill

Seam Slippage (ASTM D4034)
70 lbf min. warp and 50 lbf min. fill

Pilling Resistance (ASTM D3511) Class 4 min.



Flammability

CA Technical Bulletin 117-2013 Section 1 **ASTM E84 Class I or A**



Abrasion (ASTM D4157) 35,000 double rubs min. cotton duck

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



BeeHave 3948

Pear 2698



Pine 2806




Lemon

Currant

2802

2805





Clementine 2804



Lapis

2807

2808

Carnelian









Black 2702

Gris

2701

Slate

2703

Plum 2801

BeeHave 3948

Specifications

Content	35% post-consumer recycled polyester 65% pre-consumer recycled polyester
Weight	12.1 ± 1.0 oz./lin. yd.
Width	54" min. useable
Repeat	1.1" vertical .75" horizontal
Backing	none
Treatment	BLOCKaide® stain repellent


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

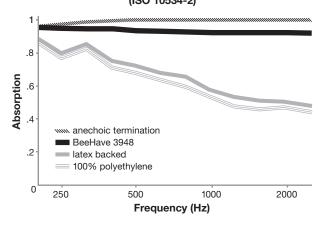

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

**	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 250 lbf min. warp and 175 lbf min. fill

Seam Slippage (ASTM D4034) 50 lbf min. warp and 40 lbf min. fill

Pilling Resistance (ASTM D3511) Class 4 min.



Flammability

CA Technical Bulletin 117-2013 Section 1 NFPA 260/UFAC Fabric Classification - Class I **ASTM E84 Class I or A**



Abrasion (ASTM D4157) 75,000 double rubs min. cotton duck

Sustainability



100% recycled and recyclable Terratex is a registered trademark of Duvaltex

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.


Visit www.revrbacoustics.com/GOM for samples.





Birdseye 2748

Zebra 2330



Vista 2320



Pewter 2329



Outlook 2321



Impression 2322



Panorama



Rock 2319



Glide 2325



Flight

Birdseye 2748

Specifications

Content	88% pre-consumer recycled polyester 12% polyester
Weight	12.5 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	20" vertical 17" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

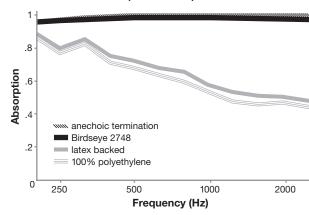

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
关	Breaking Strength (ASTM D5034) 250 lbf min. warp and 150 lbf. min. fill

Class I or A

Flammability (ASTM E84)

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.







Broadcast 2758

Mink

2686





Graphite



Serengeti 1196



Shade 2372

Broadcast 2758

Specifications

Content	100% polyester
Weight	9.5 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

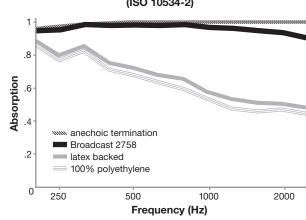

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 150 lbf min. warp and 100 lbf min. fill


Miscellaneous

Class I or A


Flammability (ASTM E84)

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

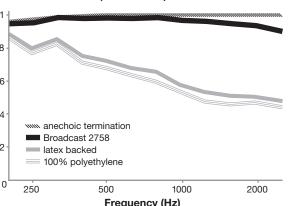

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95





Ecru

1241

Mist Green

Mushroom

1244

Chase 2138

Chambray

Moss

1250

Buff 1242




Ochre



Red Clay 1252



Coin 1243



Shadow 1246



Pewter



Pumice 1248

Chase 2138

Specifications

lyester	Content
	Weight
	Width
	Repeat
	Treatment
	Treatment


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

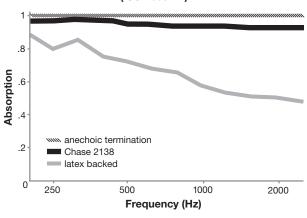

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	0.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
ø	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 280 lbf min. warp and 200 lbf min. fill
*	Flammability (ASTM E84) Class I or A

Sustainability



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.





Couture 4858






Shears 1750




Seam 1752




Thread 1755




Crewel 1758




Tailor 1757



Basting 1751



Needlework 1753



Bobbin 1754

Couture 4858

Specifications

Content	57% post-consumer recycled polyester 25% pre-consumer recycled polyester 18% polyester
Weight	9.2 ± 1.0 oz./lin. yd.
Width	54" min. useable
Repeat	14.5" vertical 14" horizontal
Backing	acrylic backcoating
Treatment	stain repellent

Cleaning Code


Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.



*Certification Marks owned by the Association for Contract Textiles, Inc.

Performance

eled polyester ed polyester	3
	_
	_
ontal	_ ~
	-
	-

Grade 4 min. at 40 hours Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet

Colorfastness to Light (AATCC 16.3 Option 3)



Breaking Strength (ASTM D5034) 115 lbf warp and 85 lbf fill

Seam Slippage (ASTM D4034) **55 lbf warp and 60 lbf fill**

Pilling Resistance (ASTM D3511) Class 5



Flammability

CA Technical Bulletin 117-2013 Section 1 ASTM E84 Class I or A



Abrasion (ASTM D4157) 100,000 double rubs cotton duck

Sustainability



FR701° 2100













130

Pearl

Light Moss

Leaf

755

Coin 794

Opal 394

481



Bone

748

Buff

460


Apricot Neutral

Moleskin

796
















Steel Grey

471

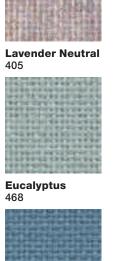




Terra

Sienna

475

Lilac

752





Violet

753

Lake

Cobalt

Flannel

795

420

756





Chrome Green

549

Baltic

Medium Grey

153


298





Rose Quartz

390





Black 408



FR701° 2100

Specifications

Content 100% post-consumer recycled po	
Weight	16.0 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

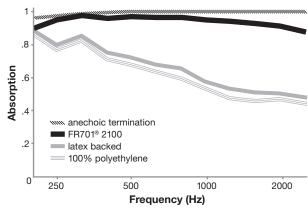

NRC of anechoic termination 1.00 NRC of fabric in front of anechoic termination .95

Performance



Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 150 lbf min. warp and fill



Flammability (ASTM E84) Class I or A

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



facts facts

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a non-directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

Spanish Olive

Heather 2633

Waters

2636

Essence 4873

Ash 2634



Tobacco 2635



Cream 2631



Tawny 2630



Clementine 2638



Boysenberry 2639

Essence 4873

Specifications

Content	100% polyester
Weight	11.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	.27" vertical .18" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 160 lbf warp and 105 lbf fill

Flammability (ASTM E84)

Sustainability

Class I or A





Charcoal Melange



Framework 2762

Sandy Pebble

2554





Chamois 2552



Beige



Fresco 2830



Dove Gray




Gray Blue 2553



Capri

Eucalyptus Blue Smooth

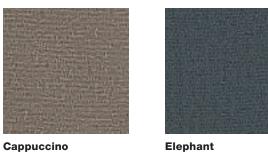

Elephant



Espresso

Framework 2762

Specifications

Content	100% polyester
Weight	9.5 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

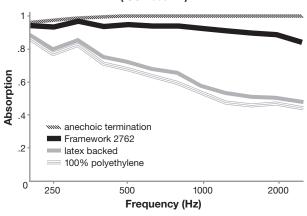

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 150 lbf min. warp and 125 lbf min. fill


Flammability (ASTM E84) Class I or Á

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.







Hatchet 2977

Armament

Blackjack

031

Baton 010



Scythe 030



Dirk 050



Brass 020



Axe 040



Smoke 061

Hatchet 2977

Specifications

Content	14% post-consumer recycled polyester 86% pre-consumer recycled polyester
Weight	12.1 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	11" vertical 16.4" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

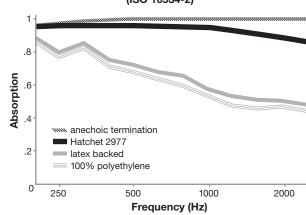

NRC of anechoic termination 1.00


NRC of fabric in front of anechoic termination .95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 200 lbf min. warp and 150 lbf min. fill

Sustainability

Class I or A



Flammability (ASTM E84)



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.





Highbeams





Kiwi 2643



Buttercup



Magenta 2692



Gold Rush



Ocean 2629



Tangerine



Grape



Bronze



Bayberry 2632



Rust 2636



Slate 2645



Expresso



Navy 2631



Maroon 2634



Black 2644

Highbeams 9834

Specifications

Content	25% post-consumer recycled polyester 75% pre-consumer recycled polyester
Weight	11.2 ± 0.5 oz./lin. yd.
Width	54" min. useable
Repeat	none
Backing	none
Treatment	BLOCKaide® stain repellent


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

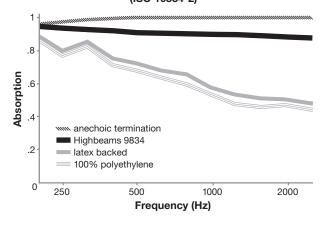

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

ester ster	*
	•
	Y

Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet

Colorfastness to Light (AATCC 16.3 Option 3) **Grade 4 min. at 40 hours**



Breaking Strength (ASTM D5034) 200 lbf min. warp and fill

Seam Slippage (ASTM D4034) 70 lbf min. warp and fill

Pilling Resistance (ASTM D3511) Class 4 min.



CA Technical Bulletin 117-2013 Section 1 NFPA 260/UFAC Fabric Classification - Class I **ASTM E84 Class I or A**



Abrasion (ASTM D4157) 50,000 double rubs min. cotton duck

Sustainability



100% recycled and recyclable Terratex is a registered trademark of Duvaltex

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.





Swan

Foggy 7041

Marsh


7062

Intermix 3035

Husky 7060




Coconut 7011





Rocket Ship 7010



Neptune 7040



Smoky Quartz

Intermix 3035

Specifications

Content	100% pre-consumer recycled polyester
Weight	15.3 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.


Acoustical Performance for Panel Applications (ISO 10534-2)

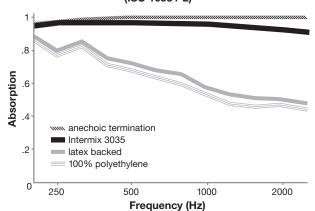


NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
*	Breaking Strength (ASTM D5034) 225 lbf min. warp and fill



Sustainability





Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.





Butter Rum

7050



Jane 9085

Natural 4061



Fuchsia 4080



4020

4091









Persimmon 4050





Guacamole Chive 4060







Blueberry

Ultramarine

4030



Jet 4040

Steel

4100

Jane 9085

Specifications

Content	100% pre-consumer recycled polyester
Weight	9.7 ± 0.5 oz./lin. yd.
Width	54" min. useable
Repeat	none
Backing	none
Treatment	BLOCKaide® stain repellent


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

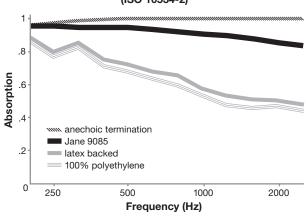

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

r	*	0
	O	0
	~ <u>}</u>	Е

Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours

Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 200 lbf min. warp and 130 lbf min. fill

Seam Slippage (ASTM D4034) 50 lbf min. warp and fill

Pilling Resistance (ASTM D3511) Class 4 min.



Flammability

CA Technical Bulletin 117-2013 Section 1 NFPA 260/UFAC Fabric Classification - Class I ASTM E84 Class I or A



Abrasion (ASTM D4157) 50,000 double rubs min. cotton duck

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



(facts fac

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.



Meander 2660





Silt 021




Sand Bar 020



Pond 011



Gravel 050



Lake 040

Spray

010



Boulder 051

Meander 2660

Specifications

Content	28% post-consumer recycled polyester 72% pre-consumer recycled polyester
Weight	11.6 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	10.5" vertical 16.2" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

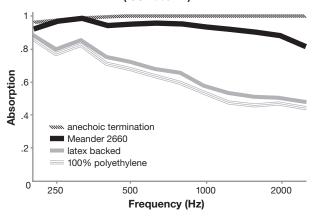

NRC of anechoic termination 1.00


NRC of fabric in front of anechoic termination .95

Performance

**	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
U	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 225 lbf min, warp and 100 lbf min, fill

* Flammability (ASTM E84)
Class I or A

Sustainability





Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.







Mingle 2527

Winter

Khaki

020

070

Biscuit 090



Straw 030




Green Tea 040



Crystal 060



Putty 080



Carbon 010

Mingle 2527

Specifications

Content	23% post-consumer recycled polyester 77% pre-consumer recycled polyester
Weight	10.9 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	16.7" vertical 16.2" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

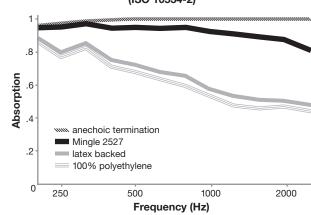


NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 250 lbf min. warp and 100 lbf min. fill

Sustainability

Class I or Á



Flammability (ASTM E84)



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.







Paradise 2659



Paradise is a printable 100% recycled polyester fabric. This capability allows for a unique look in any environment. Please note that Guilford of Maine only supplies the unprinted fabric. Whether it's full color photography, brand recognition or solid blocks of color - the creativity is up to you!

Paradise 2659

Specifications

Content	100% post-consumer recycled polyester
Weight	9.5 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

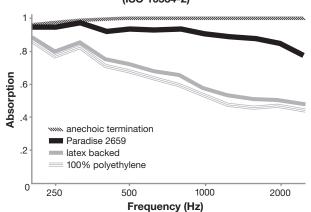

NRC of anechoic termination 1.00 .90 NRC of fabric in front of anechoic termination

Performance



Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 225 lbf min. warp and 125 lbf min. fill



Flammability (ASTM E84) Class I or A

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



Miscellaneous

Proudly woven in North America supporting our local communities.

This is a printable fabric.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.





Pursuit 3034



White Linen 7040



Whisper 7010



Dove 7011



Lemon Zest 7020



Fern 7050



Cement 7030

Mist Grey

7051



Elephant

Pursuit 3034

Specifications

Content	100% pre-consumer recycled polyester
Weight	9.1 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.


Acoustical Performance for Panel Applications (ISO 10534-2)

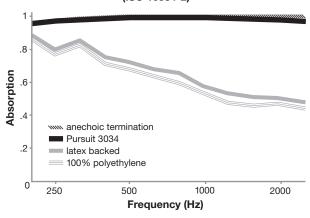


NRC of anechoic termination 1.00
NRC of fabric in front of anechoic termination 1.00

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 125 lbf min. warp and 100 lbf min. fill



Sustainability





Miscellaneous

Proudly woven in North America supporting our local communities.


Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.







Reeds 3078

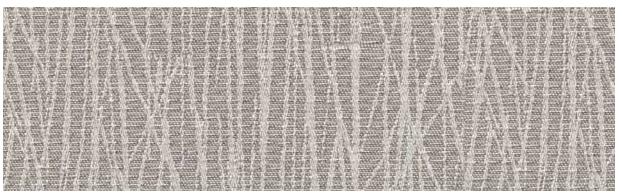

Greystone



Bisque 010




Maize 040



Sand 041



Moss 051



Mink 050



Iron 030

Reeds 3078

Specifications

Content	74% post-consumer recycled polyester 26% pre-consumer recycled polyester
Weight	11.6 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	12.5" vertical 16.9" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.


Acoustical Performance for Panel Applications (ISO 10534-2)

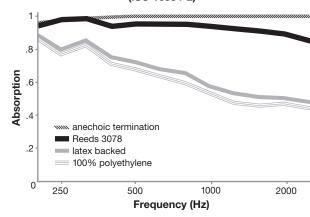


NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 250 lbf min. warp and 150 lbf min. fill



Sustainability





Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.







Sprite 2671

Snow 7040



Butter 7020



Harvest 7032



Linen 7010



Sherbet 7012



Kiwi 7031



Powder 7011



Khaki 7030



Sky 7033

Sprite 2671

Specifications

Content	5% post-consumer recycled polyester 95% pre-consumer recycled polyester
Weight	10.8 ± 0.5 oz./lin. yd.
Width	66" min. useable
Repeat	.83" vertical .26" horizontal
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

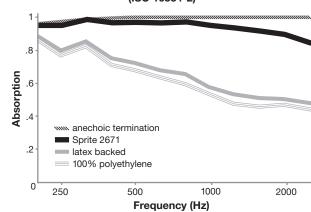

NRC of anechoic termination	
NRC of fabric in front of anechoic termination	.95

Performance

**	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
U	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 175 lbf min. warp and fill

Sustainability



Flammability (ASTM E84)

Class I or A



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.








Steadfast 3125

Muslin 012









011




Dolphin 020



Coal 040

Steadfast 3125

Pattern

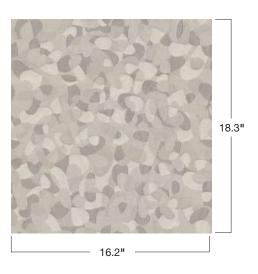


Specifications

Content	100% pre-consumer recycled polyester
Weight	11.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	18.3" vertical 16.2" horizontal

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

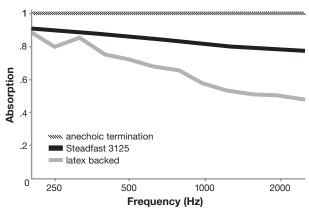

NRC of anechoic termination 1.00 NRC of fabric in front of anechoic termination 0.85

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Performance



Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) **210 lbf warp and 230 lbf fill**



Flammability (ASTM E84) Class I or A

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



(facts[™]

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit guilfordofmaine.com for samples.



*Certification Marks owned by the Association for Contract Textiles. Inc.

Sage

Strata 2968

Latte


031

050





Straw 020




Cloud 040



Sand 030



Cement 060



070

Strata 2968

Specifications

Content	100% pre-consumer recycled polyester
Weight	11.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	.1" vertical none horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

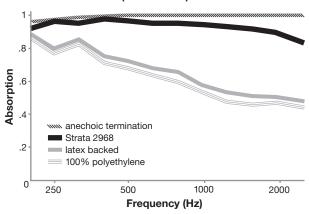

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 200 lbf min. warp and 100 lbf min. fill



Flammability (ASTM E84) Class I or A

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



(facts compliant

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

Synopsis 2136



Bisque



Taupe 1211



Ash 1210



Flannel 1222



Butterscotch



Blush 1215



Poppy



Burgundy



Chartreuse



Jade 1220



Pine



Cerulean



Blue Marine 1219



Ebony

Specifications

Content	52% post-consumer recycled polyester 48% pre-consumer recycled polyester
Weight	10.6 ± 1.0 oz./lin. yd.
Width	54" min. useable
Repeat	7.25" vertical 4.25" horizontal
Backing	none
Treatment	none

Cleaning Code


Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

May be cleaned with 10% bleach-to-water solution. Rinse well after cleaning.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

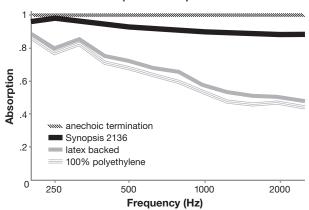

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

er recycled polyester recycled polyester	
d.	
.25" horizontal	

Breaking Strength (ASTM D5034) 295 lbf warp and 180 lbf fill

Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet

Grade 4 min. at 40 hours

Seam Slippage (ASTM D4034) 115 lbf warp and 110 lbf fill

Pilling Resistance (ASTM D3511) Class 4



CA Technical Bulletin 117-2013 Section 1 NFPA 260 Fabric Classification - Class I ASTM E84 Class I or A

Colorfastness to Light (AATCC 16.3 Option 3)



Abrasion (ASTM D4157) 100,000 double rubs cotton duck

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



⊚ facts[∞]

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



Tempest 2120

Zebra 015



Silk 045



Ginger 042



Frost

Slate

Starlight

025

031

Full Stream 012




Tumbleweed 030



Gold Rush

Sandstorm



Undercurrent 021

Tempest 2120

Specifications

Content	27% post-consumer recycled polyester 73% pre-consumer recycled polyester
Weight	11.3 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

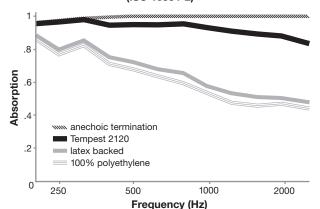

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 180 lbf min. warp and 160 lbf min. fill

Sustainability

Class I or A



Flammability (ASTM E84)



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.





Theory 3006

Marina



Pewter





Bisque 033



Camel



Shadow 010




Citrus



Spice 020



Chive 030



Lagoon

Theory 3006

Specifications

Content	100% pre-consumer recycled polyester
Weight	10.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	none


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

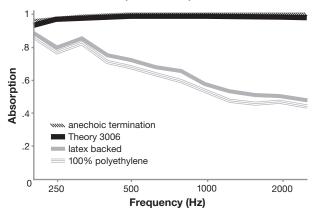

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	1.00

Performance

Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034) 175 lbf min. warp and 150 lbf min. fill

Flammability (ASTM E84) Class I or Á

Sustainability

100% recycled and recyclable
Terratex is a registered trademark of Duvaltex



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.

Truffle




Tweed 2737






Stainless 2195



Maize 2768




Leaf 2772



Twinkle 2168



Grey Green 2196



Orange



Spa 2773



Concrete



Sage Grass 2186




Lipstick



Royal Blue



Wheat 2187



Metal 2193



Raspberry



Java 2197

Tweed 2737

Specifications

Content	25% post-consumer recycled polyester 75% pre-consumer recycled polyester	
Weight	11.7 ± 1.0 oz./lin. yd.	
Width	66" min. useable	
Repeat	none	


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

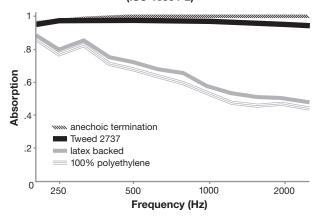

NRC of anechoic termination 1.00 NRC of fabric in front of anechoic termination

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
×	Breaking Strength (ASTM D5034) 225 lbf min. warp and 175 lbf min. fill

Sustainability



100% recycled and recyclable
Terratex is a registered trademark of Duvaltex


Flammability (ASTM E84)

Class I or Á

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

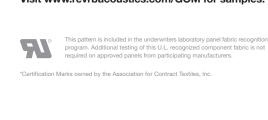



Twigs 4231

Sycamore 9101



Ash 9100



Dogwood 9102



Hawthorn 9106



Lychee 9105

Hickory

9111



Juniper 9103

Sassafras

9104

Linden

9107





Magnolia



Bayberry 9112



Poplar 9110



Buckeye 9108

Twigs 4231

Specifications

Content	44% post-consumer recycled polyester 56% pre-consumer recycled polyester
Weight	11.3 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	19.5" vertical 14.4" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.


Visit www.revrbacoustics.com/GOM for samples.




*Certification Marks owned by the Association for Contract Textiles, Inc.

Performance

yester ester	*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
	U	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
	*	Breaking Strength (ASTM D5034) 190 lbf warp and 155 lbf fill



Sustainability



eco Intelligence*

Designed and manufactured for recyclability

Eco Intelligence* is a registered trademark of Duvaltex







Vortex 3944



Custard 010







Brass 020



Pumice 031



Flax 030



Otter 040



Earthen

Vortex 3944

Specifications

Content	100% pre-consumer recycled polyester
Weight	11.2 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	.3" vertical .2" horizontal


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.


Acoustical Performance for Panel Applications (ISO 10534-2)

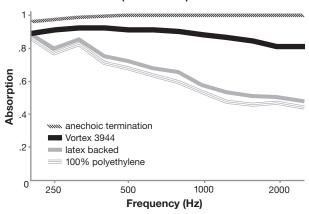


NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.90

Performance

**	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet





Sustainability





Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit www.revrbacoustics.com/GOM for samples.



program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

Whisper 1240

Spirit Dim Silence Zen Quiet 8888 1276 1282 1279 1286 **Ambience** Hush Muffle Serenity 1281 1287 Tranquility Stillness Luli Cloud **Shadow** 1289 **Placid** Reserve **Baffle** Secret Mystery 1292 Peep Mellow Chant Mum 1291 1293 1297

Whisper 1240

Specifications

Content	53% post-consumer recycled polyester 47% polyester
Weight	10.9 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	none
Treatment	polyester binder


Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

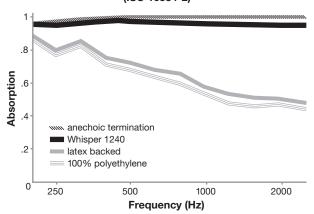

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

Performance

*	Colorfastness to Light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
0	Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
X	Breaking Strength (ASTM D5034) 270 lbf warp and 150 lbf fill
*	Flammability (ASTM E84)

Sustainability

Class I or Á



Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.





