


TRADITIONAL SERIES PRODUCT DIAGRAM





REVRBTM Acoustics Product Diagram www.REVRBAcoustics.com All Products are Class A Fire Rated. See website for more details.

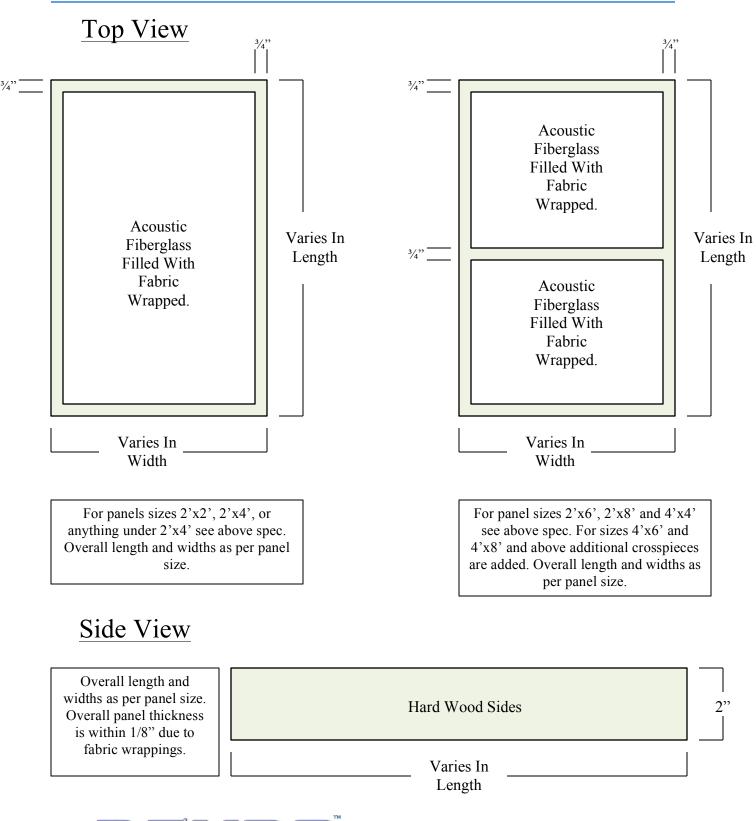

REDUCE ECHO, VOICES, REVERBERATION, & BACKGROUND NOISE

Traditional Series

PRODUCT DATA SHEET







FIRE RATING:

FRONT:

ASTM E-84: PASS - CLASS A

FLAME SPREAD INDEX: 10

SMOKE DEVELOPED: 65

SOUND ABSORPTION:

ASTM C423:

NRC: 1.05

SAA: 1.03

INSULATION DENSITY:

STANDARD: 3 PCF

HIGH IMPACT: 6-7 PCF

EDGE TYPE:

3/4" SOLID EDGE FRAME

FABRIC TYPE:

GUILFORD OF MAINE

THICKNESS:

2" (OTHER THICKNESSES AVAILABLE)

MOUNTING TYPE:

F-5 MOUNTING: Z-CLIP (WALLS) TYPE A: CEILING CLIPS (CEILING) BACK:



REVRB™ TRADITIONAL SERIES IS A LIGHTWEIGHT ACOUSTICAL PANEL DESIGNED TO BE MOUNTED ON ANY CEILING OR WALL. EVERY REVRB™ PRODUCT IS HANDBUILT IN EASTON, MA. WITH A 3/4" SOLID EDGE FRAME AND A TWO DENSITY OPTION TO CHOOSE FROM: STANDARD 3 PCF OR HIGH-IMPACT 6-7 PCF FIBERGLASS CORE, THE TRADITIONAL SERIES ACOUSTICAL PANEL IS ABSORBENT AND DURABLE ENOUGH TO BE EFFECTIVE IN ANY LOCATION. WITH HARD WOOD FRAME DESIGN, EACH PRODUCT WILL MAINTAIN SHAPE FOR YEARS TO COME. THE FRONT OF THE PANEL IS WRAPPED IN A GUILFORD OF MAINE ACOUSTICAL FABRIC TO ACHIEVE AN NRC RATING OF 1.05 AND AN SAA RATING OF 1.03. ALL REVRB™ TRADITIONAL PANELS ACHIEVE A CLASS A FIRE-RATING AND CAN BE SIZED TO FIT ANY DÉCOR. STANDARD SIZES ARE: 2'x2', 2'x4, 2'x6', 2'x8', 4'x4', 4'x6', 4'x8'. CUSTOM SIZES AVAIABLE FOR LARGE PROJECTS.

1/3 OCTAVE SOUND ABSORPTION COEFFICIENTS ASTM C423 250 500 1000 2000 4000 NRC 125 SAA 0.84 1.1 1.04 1.11 1.05 1.03 0.25 1.14